


BSUDVM20/4.0IP/INT 4MP Network IR Dome



Key features

- 1/3" Progressive Scan CMOS
- VF Lens 3.0-12mm
- Resolution 2688x1520
- Multiple Streams
- IR Range 15-20m
- Smart IR
- Low bitrate ,Excellent low light performance
- 3D DNR,dWDR,ICR
- ROI,Defog,HLC,Corridormode,DIS
- Multiple Video Analytics

Dimension

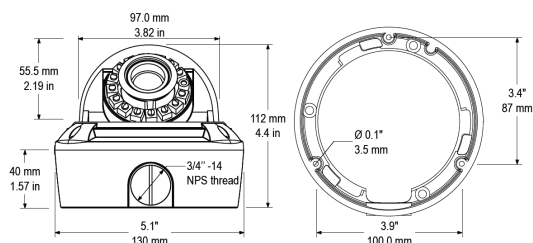

Accessories



Specifications

CAMERA	
Image Sensor	1/3" Progressive Scan CMOS
Min. illumination	Color 0.01Lux;IR ON 0 Lux
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Yes
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens	3.0-12mm VF Lens
FOV	87° ~ 35°
IR LED	12pcs
IR Range	15-20m
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ;Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max.Resolution	2688*1520/2560*1440/20fps,2304*1296/25fps,1920*1080/30fps
Stream	Stream1 2688*1520/2560*1440/2304*1296/1920*1080 Stream 2 720p to QVGA
Image Setting	Rotate Mode,Saturation,Brightness,Contrast,Sharpness
HLC	Yes
9:16 Corridor Mode	Yes
DIS	Auto
ROI	Yes
Defog	Yes
NETWORK	
Network Protocols:	HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPoE, Unicast and Multicast supported.
Alarm Trigger	Base: MotionDetection,LineCrossing,Tamper, Area Intrusion, Network disconnect,Diskalarm,I/O alarm Advance: Motion Detection,LineCrossing,Tamper, Area Intrusion, Camera Move,Dwell,MultipleDwell,RetrogradeDetection,ObjectLeft,ObjectRemove ,Abnormal Speed,Illegal Parking,Networkdisconnect,Diskalarm,I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Chinese,Polish, Italian, Portuguese, Spanish.
System Compatibility	Onvif,CGI
INTERFACE	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	1ch Audio In,1ch Audio Out
Alarm I/O	1ch Alarm In,1ch Alarm Out
RS485	N/A
BNC Output	Yes
Reset Button	Yes
Edge Storage	Micro SD/SDHC/SDXC slot ,Max 64GB
GENERAL	
Power Supply	AC24V/DC12V/POE
Power Consumption	3W(IR LED OFF) ; 5W (IR LED ON)
OperatingTemperature	-20℃~+60℃
Operating Humidity	0% - 90% RH
Ingress Protection	IP66
Approvals	CE / FCC
Product Dimensions	φ 130×112mm
Product Weight	900g