


BSUXVM00/2.0IP/WDR WDR 1080P Network Box Camera



Key features

- 1/2.8" Progressive Scan CMOS
- WDR>120dB
- Full HD 1080P
- Triple Streams
- 3D DNR,ICR

Dimension

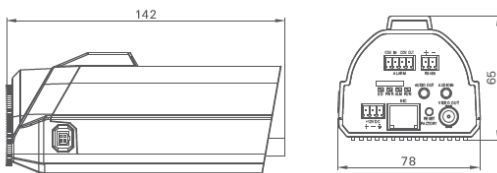

Accessories



SN-CH302HF



SN-BK314

Specifications

CAMERA	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. illumination	Color 0.1Lux(AGC ON);B&W 0.01Lux(AGC ON)
Day & Night	ICR
Shutter Speed	1/50-1/64000
Auto Iris	N/A
Wide Dynamic Range	True WDR>120dB
Digital Noise Reduction	2D/3D
Lens	N/A
FOV	N/A
IR LED	N/A
IR Range	N/A
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ;Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max.Resolution	1920x1080/30fps
Stream	Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA Stream 3 1920x1080 to QVGA
Image Setting	Rotate Mode,Saturation,Brightness,Contrast,Sharpness
HLC	Auto
9:16 Corridor mode	N/A
DIS	N/A
ROI	N/A
Defog	N/A
NETWORK	
Network Protocols:	HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPoE, Unicast and Multicast supported.
Alarm Trigger	Motion Detection,Network disconnect,Disk alarm,I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Chinese,Polish,Italian,Portuguese,Spanish.
System Compatibility	Onvif ,CGI
INTERFACE	
Ethernet	I1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	1ch Audio In,1ch Audio Out
Alarm I/O	1ch Alarm In,1ch Alarm Out
RS485	Yes
BNC Output	Yes
Reset Button	Yes
Edge Storage	Micro SD/SDHC slot ,Max 32GB
GENERAL	
Power Supply	DC12V/POE
Power Consumption	5W(MAX)
OperatingTemperature	-10℃~+50℃
Operating Humidity	0% - 90% RH
Ingress Protection	N/A
Approvals	CE / FCC
Product Dimensions	142mm(D)x78mm(W)x65mm(H)
Product Weight	360g