


CP- TNW-HP8H1-12

9 Port Fast Ethernet switch with 8 POE

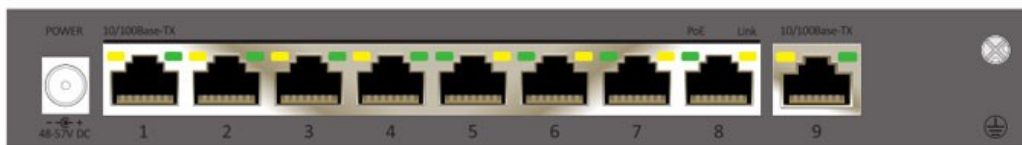

Main Features

- 1pc 100Mbps uplink Ethernet port, 8 pcs 100Mbps downlink Ethernet ports every port supports MDI/MDIX
- One key CCTV mode; 1~8 downlink ports can only communicate with uplink ports; Restrain network storm under 3Mbps
- Extend downlink ports transmission distance to 250m
- Standard: Meet IEEE802.3, IEEE802.3u, IEEE802.3 af/at standards, PoE use End-Span, the spare cable can be of other use
- Protection: Excellent anti-thunder, anti-static and anti-interference ability

CP- TNW-HP8H1-12

9 Port Fast Ethernet switch with 8 POE

Feature

Power Supply
Packet Forwarding Rate
Ethernet Standard
Buffer
Exchange Capacity
Transmission Distance
MAC Address List
Ethernet Speed
PoE Power Budget
CCTV Mode
Ethernet Port Light
Operating Temperature
Power Consumption
Pluse Group
Storage Temperature
ESD
Humidity
Anti-thunder Level
Dimensions
Color
Weight
Power Light

Specification

Power Adapter
1.34Mpps
IEEE 802.3/802.3u/802.3af/at
768K
1.8Gbps
1~8 ports: Default:0~100m; CCTV:0~250m; Uplink:0~100m
2K
1~8 ports:Default:10/100Mbps; CCTV:10Mbps; UPLINK:100Mbps
120W
1pc (Green), green indicates CCTV
2pc (Yellow & Green) on RJ45,yellow indicates PoE, green indicates Link/Act
-10°C~+55°C
<5W
Level 3 Standard: IEC61000-4-4
-40°C~+85°C
6KV/8KV Standard: IEC61000-4-2
0~95%
Common mode 6KV Standard: IEC61000-4-5
200mm x 101.8mm x 27mm
Gray
500g
1pcs (Red)