


CP- UVC-TA40R5**4 MP Array HDCVI Bullet Camera - 50 Mtr.****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- Max 30fps@4MP
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm lens (6mm, 8mm optional)
- OSD Menu, control over coaxial cable, 2D-DNR
- Array Range of 50 Mtrs. , IP67
- HD and SD switchable

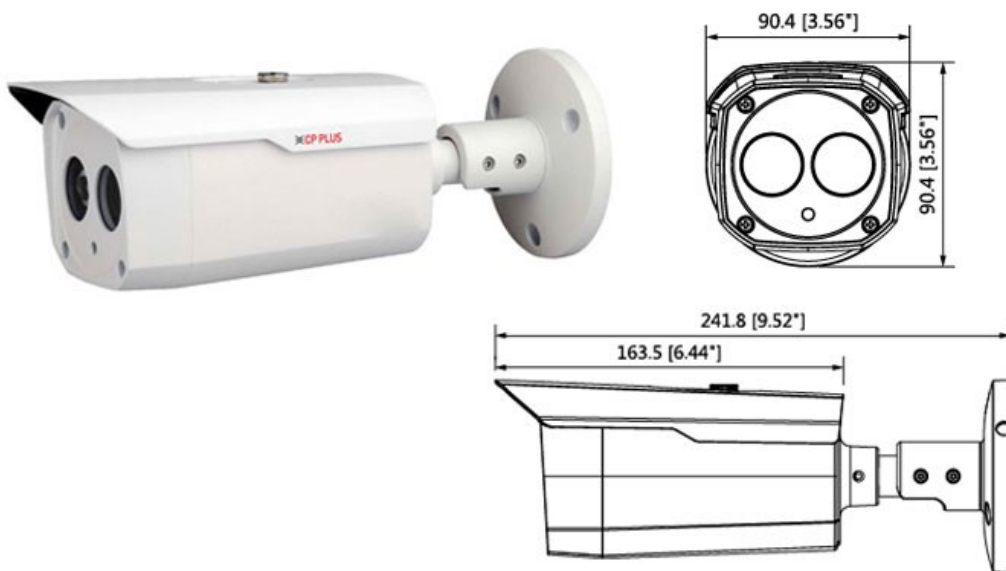

**Product casing and specifications are subject to change without prior notice*

CP- UVC-TA40R5

4 MP Array HDCVI Bullet Camera - 50 Mtr.



Feature

Image Sensor
Minimum Illumination
Effective Pixels
Shutter Speed
White Balance
Gain Control (AGC)
Lens
Back Light Compensation
S/N Ratio
Video Streaming
Video Output
ICR
OSD
IR
No. of IR LEDs
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" PS CMOS
0.03Lux/F2.0, 30IRE, 0Lux IR on
2560×1440 , 4MP
PAL: 1/25~1/100000s NTSC: 1/30~1/100000s
Auto / Manual
Auto/Manual
3.6mm (6mm, 8mm Optional)
BLC / HLC / DWDR
More than 65dB
25/30fps@4MP, 25/30fps@1080P, 25/30fps@720P
1-channel BNC high definition video output / CVBS video output (Can switch)
Auto (ICR) / Manual
Multi-language
Array Range of 50 Mtr.
1pcs
-40°C~+60°C / Less than 90%RH
12V DC ±25%
Max 4.1W (12V DC, IR on)
IP67
241.8mm x 90.4mm x 90.4mm
0.58 kg