


CP-UNC-TD13L6

1.3 MP HD IR Bullet Camera - 60Mtr.

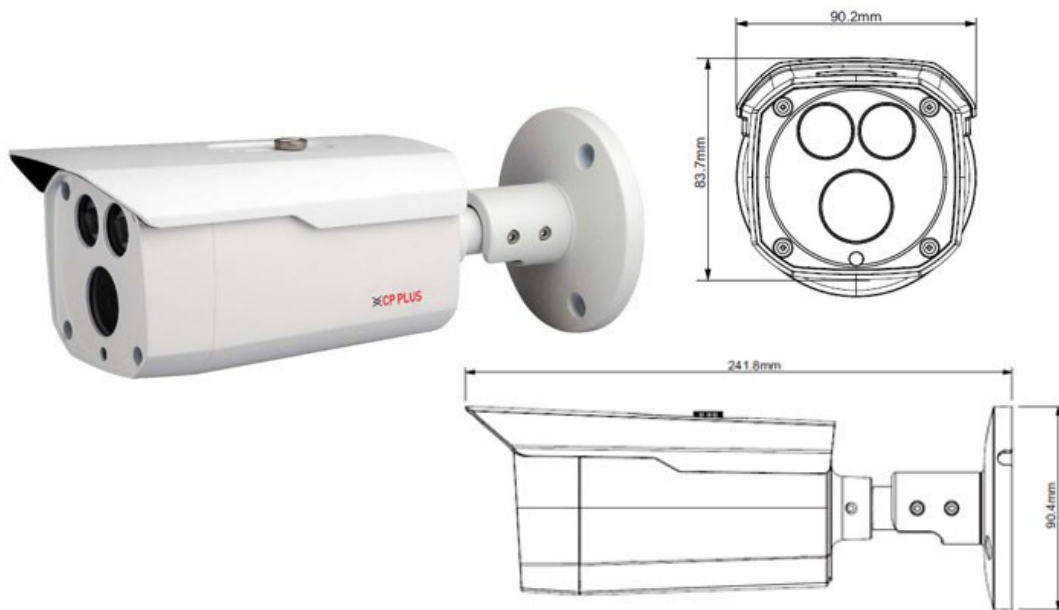

Main Features

- 1/3" 1.3Megapixel PS CMOS Image Sensor
- Max 25/30fps@1.3MP
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Smart Detection supported
- 6mm fixed lens
- IR Range of 60 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-TD13L6

1.3 MP HD IR Bullet Camera - 60Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
S/N Ratio
Video Streaming
Resolution
Privacy Mask
ICR

Protocol

Smart Detection
Ethernet
User Account
IR
Smart Phone
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 1.3Megapixel progressive scan CMOS
0.01Lux/F2.0(Color), 0Lux/F2.0(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
6mm
BLC / HLC / DWDR
More than 50dB
Main Stream: 1.3M/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1~13/4fps)
1.3M(1280x960)/720P(1280x 720)/ D1(704x 576/704x 480) /CIF(352x 288/352x 240)
Up to 4 areas
Auto(ICR)/Color/B/W
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
Tripwire, Intrusion, Scene Change, Face detect
RJ-45 (10/100Base-T)
20 Users
IR Range of 60 Mtr.
iPhone, iPad, Android, Windows Phone
-30°C~+60°C, Less than 95% RH
DC12V, PoE (802.3af)
Max 3.7W
IP67
Φ90.4mm × 241.8mm
0.61Kg(with package 0.80kg)