
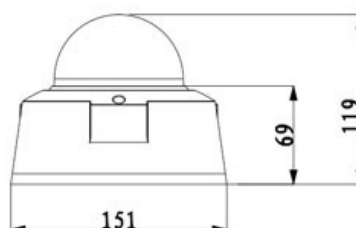


CP- UNC-VH20ZL3-MD

2 MP WDR IR Vandal Dome Camera - 30Mtr.



Main Features

- 1/1.9" 2MP PS CMOS Image Sensor
- Max 50/60fps@1080P
- Support H.264,MJPEG dual codec
- Ultra WDR(120dB), Ultra Defog, ROI, EIS, Smart detection, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- 4 -8mm Motorized Lens
- IR Range of 30 Mtrs, IP66, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP-UNC-VH20ZL3-MD

2 MP WDR IR Vandal Dome Camera - 30Mtr.

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Video Compression
Back Light Compensation
S/N Ratio
Video Streaming
Video Output
Resolution
Privacy Mask
ICR
Audio Input
Audio Compression
Audio Output
Alarm IN
Alarm Out

Specification

1/1.9" 2MP Progressive scan CMOS
0.002Lux/F1.65 (Color),0Lux/F1.65(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
4-8 mm Motorized Lens
H.264/MJPEG
BLC/ HLC/ WDR(120dB)
More than 50dB
Main Stream:1080P/720P(1 ~ 50/60fps), Extra Stream: D1/CIF(1 ~ 50/60fps), Third Stream: 1080P/720P/D1(1 ~ 25/30fps)
1 Port
1080P(1920× 1080) / 720P(1280× 720) /D1(704× 576) /CIF(352× 288)
Up to 4 areas
Auto(ICR)/Color/B/W
1 Channel
G.711a / G.711u
1 Channel
1 Channel In
1 Channel Out

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI

Tripwire, Intrusion, Scene Change, Missing/Abandoned, Audio detect, Face detect
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
Max 64GB
-30°C~+60°C, Less than 95% RH
DC12V(AC24V optional), PoE (802.3af)
<12W (IR on: +2W)

Protocol

Smart Detection
Ethernet
User Account
Smart Phone
IR
Micro SD
Operating Temperature
Power Source
Power Consumption

CP- UNC-VH20ZL3-MD

2 MP WDR IR Vandal Dome Camera - 30Mtr.

Feature

Weatherproof Standard

Dimension

Weight

Specification

IP66 & IK10

Φ151mm×119mm

1.25 Kg.