


CP- UNC-DD41L3-D**4 MP Full HD WDR IR Dome Camera - 30Mtr.****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- 25/30fps@4M (2688x1520)
- H.265 and H.264 triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

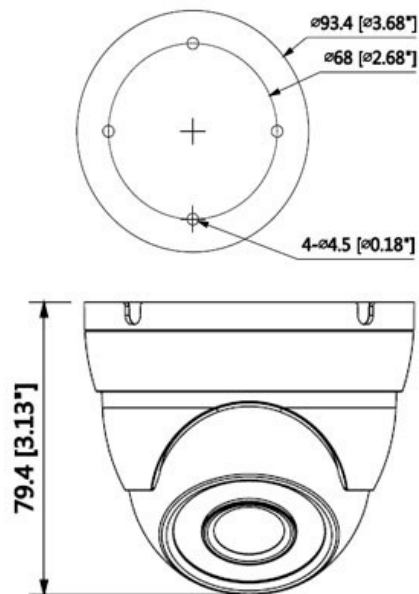

CP- UNC-DD41L3-D

4 MP Full HD WDR IR Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Effective Pixels
White Balance
Gain Control (AGC)
Lens
Video Compression
S/N Ratio
Back Light Compensation
Video Streaming

Resolution

Digital Zoom
Motion detection
Privacy Mask
ICR
ROI
Bit Rate

Protocol

Smart Detection
Ethernet
User Account
Smart Phone
IR
No. of IR LEDs
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard

Specification

1/3" 4MP Progressive scan CMOS
0.08Lux/F2.0 (Color), 0Lux/F2.0 (IR on)
2688(H) x 1520(V)
Auto/Natural/Street Lamp/Outdoor/Manual
Auto/Manual
3.6mm(2.8mm, 6mm optional)
H.265+/H.265/H.264+/H.264
More than 50dB
BLC / HLC / WDR(120dB)
Main Stream: 4M(1~25/30fps) , Sub Stream: D1(1~25/30fps) ,Third Stream: 720P(1~25/30fps)

4M(2688x1520)/3M(2304x1296)/ 1080P(1920x1080)/1.3M(1280x960)/ 720P(1280x720)/D1(704x576/704x480)/ VGA(640x480)/CIF(352x288/352x240)

16x
Off / On (4 Zone, Rectangle)
Up to 4 areas
Auto (ICR)/Color/B/W
Off / On (4 Zone)
H.264: 24~10240Kbps, H.265: 14~9984Kbps

HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI

Tripwire, Intrusion, Object Abandoned/Missing, Face detect
RJ-45 (10/100Base-T)
10/ 20 Users
iPhone, iPad, Android Phone
IR Range of 30 Mtr.
12
-30°C~+60°C, Less than 95% RH
DC12V, PoE (802.3af)
<6W
IP67

CP- UNC-DD41L3-D

4 MP Full HD WDR IR Dome Camera - 30Mtr.



Feature

Dimension

Weight

Specification

Ø93.4mm×79.4mm

0.3Kg