
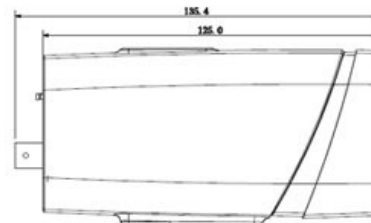


CP-UNC-BE50-MD

5MP WDR Box Camera



Main Features

- 1/3" 5MP PS CMOS Image Sensor
- Max 25fps @ 5MP
- H.264 and MJPEG Triple-Stream Encoding
- WDR(120dB), Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- C/CS Mount Lens
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-BE50-MD

5MP WDR Box Camera



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Video Compression
S/N Ratio
Back Light Compensation
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Output
Audio Compression
Alarm IN
Alarm Out
Protocol
Smart Detection
Ethernet
User Account
Smart Phone
Micro SD
Operating Temperature
Power Source
Power Consumption
Dimension
Weight

Specification

1/3" 5MP Progressive scan CMOS
0.01Lux/F2.0 (Color), 0Lux/F2.0(IR on)
Auto/Manual, 1/3(4)~1/100000s
Auto
Auto/Manual
C/CS Mount Lens
H.264/H.264H/H.264B/MJPEG
More than 50dB
BLC/ HLC/ WDR(120dB)
Main Stream: 5M(1~25/30fps) / 1080P/720P(1~25/30fps), Sub Stream 1: D1/CIF(1 ~ 25/30fps), Sub Stream 2: 720P(1-20fps)
5M(2536×1920) / 3M(2048×1536) / 1080P(1920×1080) / 720P(1280×720) / D1(704×576) / CIF(352×288)
Up to 4 areas
Auto(ICR)/Color/B/W
1 Channel
1 Channel
G.711a / G.711u/ AAC
2 Channel
1 Channel
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS,B onjour, ONVIF, PSIA, CGI
Tripwire, Intrusion, Scene Change, Missing/Abandoned, Audio detect, Face detect
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
Micro SD card, Max 128GB
-40°C~+60°C, Less than 95% RH
DC12V/AC24V, PoE (802.3af)
< 6.5W (ABF&ICR on)
74.1mm× 65.5mm× 135.4mm
0.3kg



*Product casing and specifications are subject to change without prior notice