


CP- UNC-VD41L5C-MD

4 MP Full HD WDR IR Vandal Dome Camera - 50Mtr.

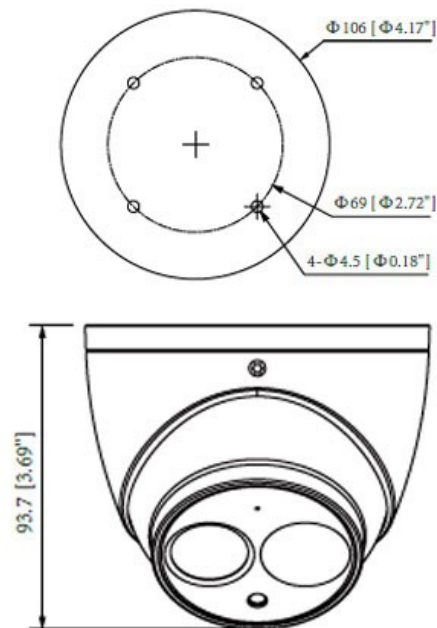

Main Features

- 1/3" 4Megapixel PS CMOS Image Sensor
- 25/30fps@4MP(2688x1520)
- H.265 and H.264 Triple - stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 2.8mm fixed lens (3.6mm,6mm optional)
- IR Range of 50 Mtrs, IP67, PoE, SD Card
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-VD41L5C-MD

4 MP Full HD WDR IR Vandal Dome Camera - 50Mtr.



Feature

Image Sensor
Effective Pixels
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Digital Zoom
Motion detection
Privacy Mask
ICR
ROI
Audio Compression
Audio
Protocol
Smart Detection
Ethernet
User Account
IR
Smart Phone
Micro SD
Operating Temperature
Power Source
Power Consumption

Specification

1/3" 4Megapixel progressive scan CMOS
2688(H) x 1520(V)
0.08Lux/F2.0 (Color), 0Lux/F2.0 (IR on)
Auto/Manual, 1/3(4)~1/100000s
Auto/Manual
2.8mm (3.6mm, 6mm optional)
Auto/Manual
BLC / HLC / WDR(120dB)
More than 50dB
H.265+/H.265/H.264+/H.264
Main Stream: 4MP(1~25/30fps), Sub Stream: D1(1~25/30fps), Third Stream: 720P(1~25/10fps)
4MP(2688x1520) / 3MP(2304x1296) / 1080P(1920x1080) / 1.3MP(1280x960) / 720P(1280x720) / D1(704x576/704x480) / VGA(640x480) / CIF(352x288/352x240)
16x
Off / On (4 Zone, Rectangle)
Off / On (4 Area, Rectangle)
Auto (ICR)/Color/B/W
Off / On (4 Zone)
G.711a/ G.711Mu/ AAC/ G.726
Built-in Mic
HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI
Tripwire, Intrusion, Object Abandoned/Missing, Face Detection
RJ-45 (10/100Base-T)
20 Users
IR Range of 50 Mtr.
IOS, Android
Micro SD, Max 128GB
-30°C~+60°C, Less than 95% RH
DC12V, PoE (802.3af)
Max 5W



CP- UNC-VD41L5C-MD

4 MP Full HD WDR IR Vandal Dome Camera - 50Mtr.



Feature

Weatherproof Standard

Dimension

Weight

Specification

IP67

Φ106mm x 93.7mm

0.47 Kg