


CP- UVP-2013L10

1 MP 720P HDCVI IR PTZ Camera

CP PLUS
CORAL

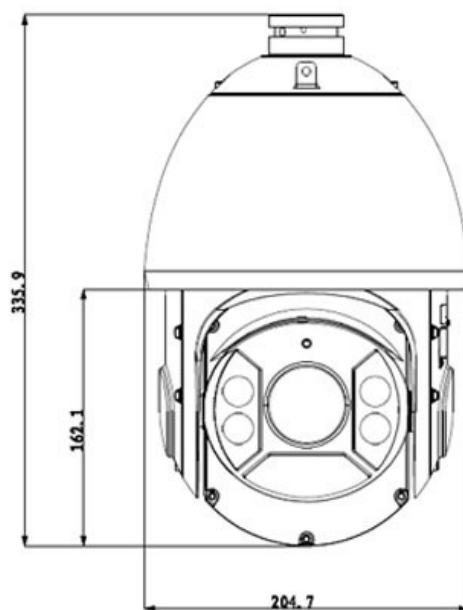

Main Features

- 1/3" Exmor HQIS Pro Image sensor
- Powerful 20x Optical and 16x Digital zoom
- DWDR, Day/Night(ICR), Ultra DNR
- Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
- Max 240°/s pan speed, 360° endless pan rotation
- IR Range of 100 Mtr.
- Built-in 2/1 alarm in/out, IP66



*Product casing and specifications are subject to change without prior notice

CP- UVP-2013L10

1 MP 720P HDCVI IR PTZ Camera



Feature

Image Sensor
 Effective Pixels
 Video Output
 S/N Ratio
 Minimum Illumination
 Focal Length
 White Balance
 Focus Control
 Angle of View
 Close Focus Distance
 Electronic Shutter
 AGC control
 Back Light Compensation
 Optical Zoom
 Digital Zoom
 Pan Travel
 Tilt Travel
 Presets
 Preset Speed
 Special Features
 Privacy Masking
 Power up Action
 Idle Motion
 Time Task
 Day/Night: IR Cut Filter
 Video Compression
 Video Streaming
 Audio Comprerssion
 Audio Streaming

Specification

1/3" Exmor HQIS Pro
 1280(H) x 960(V)
 1 channel BNC HDCVI high definition video output
 More than 50dB
 Color: 0.05Lux@F1.4, B/W: 0.005Lux@F1.4, 0Lux (IR on)
 4.7mm~94mm
 Auto, ATW, Indoor, Outdoor, Manual
 Auto / Manual
 H: 54.1° ~ 3.2°
 100mm~ 1000mm
 1/1 ~ 1/30,000s
 Auto / Manual
 BLC / HLC / DWDR
 20x
 16x
 360° endless, Pan Speed: 0.1° ~ 160°/sec
 -15° ~ 90°, Tilt Speed: 0.1° ~ 120°/sec
 255
 Pan: 240° /s; Tilt: 200° /s
 IR Range upto 100m, Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
 Up to 24 areas
 Auto restore to previous PTZ and lens status after power failure
 Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
 Auo activation of Prese/Pan/Scan/Tour/Pattern by preset-time
 Auto(ICR) / Color / B/W
 H.264 / MJPEG
 25/30fps@720P
 G.711a / G.711u(32kbps)/ PCM(128kbps)
 1 channel In

CP- UVP-2013L10

1 MP 720P HDCVI IR PTZ Camera



Feature

Alarm
Max Remote Users
Operating Temperature
Smart Phone
Weather Proof Standard
Dimension
Weight
Power Source
Power Consumption

Specification

2/1 channel In/Out
20 users
-40°C ~ 60°C / Less than 90% RH
iPhone, iPad, Android, Windows Phone
IP66
Φ204.7(mm) x 335.9(mm)
7.5kg
AC 24V/2.2A(±10%)
10.5W, 26W (IR on, Heater on)