


CP- UNP-0420L3-P**2 MP Full HD IP IR PTZ Dome Camera****Main Features**

- 1/2.8" CMOS Image sensor
- Powerful 4x Optical and 16x Digital zoom
- H.264 & MJPEG dual-streams encoding
- Max. 25/30fps@1080P and 50/60fps@720P Resolution
- IR Range of 30 Mtr.
- Up to 300 Presets, 8 Tour, 5 Pattern, 5 Auto scan
- Max 100°/s pan speed, 360° endless pan rotation
- CMS Software: KVMs Pro, vOptimus Pro
- Mobile Software: iCMOB, gCMOB, wCMOB

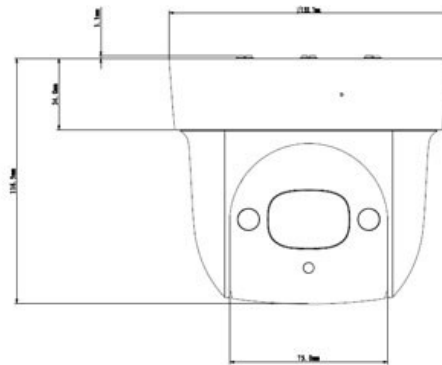

**Product casing and specifications are subject to change without prior notice*

CP- UNP-0420L3-P

2 MP Full HD IP IR PTZ Dome Camera



Feature

Image Sensor
Effective Pixels
S/N Ratio
Minimum Illumination
Focal Length
White Balance
Focus Control
Close Focus Distance
Angle of View
Electronic Shutter
AGC control
Back Light Compensation
Optical Zoom
Digital Zoom
Pan Travel
Tilt Travel
Presets
Preset Speed
Privacy Masking
Special Features
Power up Action
Idle Motion
Time Task
Day/Night: IR Cut Filter
Video Compression
Video Streaming
Audio Compression
Audio Streaming
IVS
Protocols

Specification

1/2.8" CMOS
1980(H) x 1080(V), 2Megapixels
More than 55dB
Color: 0.05Lux@F1.6; B/W: 0.005Lux@F1.6
2.7mm~11mm
Auto, ATW, Indoor, Outdoor, Manual
Auto / Manual
100mm~ 1000mm
H: 54.1° ~ 3.2°
1/3 ~ 1/30,000s
Auto / Manual
BLC / HLC / DWDR (Digital WDR)
4x
16x
0° ~ 360° limited
0° ~ 90°, auto flip 180°
300
Pan: 100° /s; Tilt: 60° /s
Up to 24 areas
IR Range of 30 Mtr., Up to 300 Presets, 8 Tour, 5 Pattern, 5 Auto scan
Auto restore to previous PTZ and lens status after power failure
Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
Auto (ICR) / Color / B/W
H.264 / MJPEG
Main Stream: 1080P(1 ~ 25/30fps)/ 720P (1 ~ 50/60fps), Sub Stream : D1/CIF(1 ~ 25/30fps)
G.711a / G.711u(32kbps)/ PCM(128kbps)
Built-in Mic
Tripwire, Intrusion, Abandoned Object Detection, Missing Object Detection, Face Detection
IPv4/ IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x



*Product casing and specifications are subject to change without prior notice

CP- UNP-0420L3-P

2 MP Full HD IP IR PTZ Dome Camera



Feature

Max Remote Users
Operating Temperature
Smart Phone
Memory Slot
Dimension
Weight
Power Source
Power Consumption

Specification

20 users
-30°C ~ 60°C (-22°F ~ +140°F) / Less than 90% RH
iPhone, iPad, Android, Windows Phone
Micro SD, Max 64GB
Φ132.7mm x 116.5 mm
0.95kg
AC24V/ DC12V, POE plus(802.3at)
10W, 13W (IR on)