



CP- UNP-3021L20-DAP

2MP 30x WDR IP IR PTZ Dome Camera

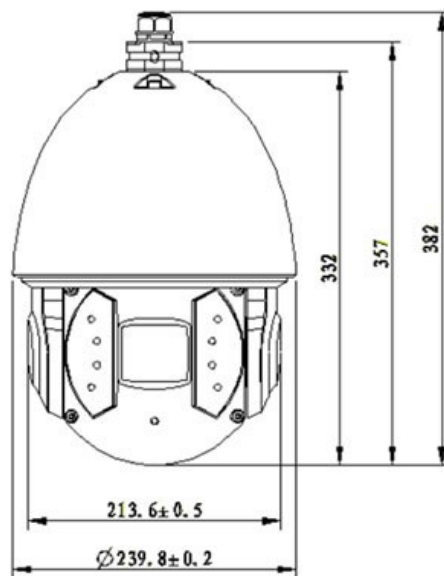

Main Features

- 1/1.9" 2MP CMOS Image sensor
- Max 60fps@720P and 30fps@1080P resolution
- Powerful 30x Optical and 16x Digital zoom
- WDR(120dB), Day/Night(ICR), 3D DNR, BLC, HLC, AWB
- Up to 300 Presets, 8 Tour, 5 Pattern, 8 Auto scan, 8 Auto Pan
- Max 300°/s pan speed, 360° endless pan rotation
- Auto-tracking and IVS, IR Range of 200 Mtr.
- Built-in 7/2 alarm in/out, IP67, IK10, Hi-PoE, Micro SD
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMs Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNP-3021L20-DAP

2MP 30x WDR IP IR PTZ Dome Camera



Feature

Image Sensor
Effective Pixels
Video Output
S/N Ratio
Minimum Illumination
Focal Length
White Balance
Focus Control
Angle of View
Close Focus Distance
Electronic Shutter
AGC control
Back Light Compensation
Optical Zoom
Digital Zoom
Pan Travel
Tilt Travel
Presets
Preset Speed
Special Features
Privacy Masking
Power up Action
Time Task
Idle Motion
Day/Night: IR Cut Filter
Video Compression
Video Streaming
Audio Comprersion
Audio Streaming
Auto Tracking
Networking

Specification

1/1.9" CMOS
1920(H) x 1080(V), 2 Megapixels
BNC(1.0Vp-p/75Ω), PAL / NTSC
More than 56dB
Color: 0.002Lux@F1.5; 0Lux@F1.5 (IR on)
6mm~180mm
Auto, ATW, Indoor, Outdoor, Manual
Auto / Manual
H: 61.2° ~ 2.1°
100mm~ 1000mm
1/1 ~ 1/30,000s
Auto / Manual
BLC / HLC / WDR(120dB)
30x
16x
0° ~ 360° endless, Pan Speed: 0.1° ~ 200°/sec
-20° ~ 90°, auto flip 180°, Tilt Speed: 0.1° ~ 120°/sec
300
Pan: 300° /s; Tilt: 200° /s
IR Range of 200 Mtr., Up to 300 Presets, 8 Tour, 5 Pattern, 8 Auto scan, 8 Auto Pan
Up to 24 areas
Auto restore to previous PTZ and lens status after power failure
Auto activation of Preset/Pan/Scan/Tour/Pattern by preset-time
Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
Auto(ICR) / Color / B/W
H.265 / H.264 / MJPEG
Main Stream: 1080P/ D1 (1 ~ 25/30fps), 720P(1~50/60fps), Sub Stream1: D1/CIF(1 ~ 25/30fps), Sub Stream 2: 720P/D1/ CIF (1 ~ 25/30fps)
G.711a/G.711mu/G.726/AAC
1/1 channel In/Out
Support
RJ-45 (10/100Base-T), 1RS485



CP- UNP-3021L20-DAP

2MP 30x WDR IP IR PTZ Dome Camera



Feature

IVS

Protocols

Alarm

Max Remote Users

Memory Slot

Operating Temperature

Smart Phone

Weather Proof Standard

Dimension

Weight

Power Source

Power Consumption

Specification

Tripwire, Intrusion, Abandoned/Missing, Face Detection

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI

7/2 channel In/Out

20 users

Micro SD, Max 128GB

-40°C ~ 70°C (-40°F ~ +158°F) / Less than 90% RH

iPhone, iPad, Android Phone

IP67, IK10

Φ240(mm) x 382 (mm)

6.75 kg

AC24V/3A(±25%), Hi-POE

24W, 38W (IR on)