
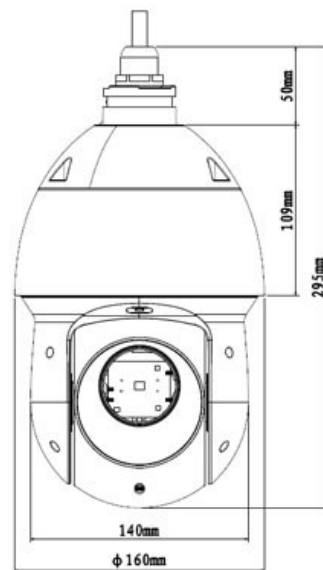


CP- UNP-D2521L10-DP**2 MP 1080P IR IP PTZ Camera****Main Features**

- 1/2.8" 2MP Exmor R CMOS Image sensor
- Max. 50/60fps@1080P, 25/30/50/60fps@720P
- Powerful 25x Optical and 16x Digital zoom
- WDR(120dB), 3D DNR, Day/Night(ICR)
- Up to 300 presets, 8 auto scan, 8 tour, 5 pattern, 8 auto pan
- IR Range of 100 Mtr.
- Max 240° /s pan speed, 360° endless pan rotation
- Built-in 2/1 alarm in/out, IP66, Support PoE Plus
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMs Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNP-D2521L10-DP

2 MP 1080P IR IP PTZ Camera



Feature

Image Sensor
Effective Pixels
S/N Ratio
Minimum Illumination
Focal Length
Focus Control
White Balance
Close Focus Distance
Angle of View
AGC control
Back Light Compensation
Optical Zoom
Digital Zoom
Pan Travel
Tilt Travel
Manual Speed
Presets
Preset Speed
Privacy Masking
Special Features
Power up Action
Idle Motion
Day/Night: IR Cut Filter
Video Compression
Video Streaming
Audio Compression
Audio Streaming
Networking
IVS
Protocols

Specification

1/2.8" 2MP Exmor R CMOS
1920(H) x 1080(V), 2 Megapixels
More than 50dB
Color: 0.005Lux@F1.6; 0Lux@F1.6 (IR on)
4.8mm~120mm
Auto / Manual
Auto, ATW, Indoor, Outdoor, Manual
100mm~ 1000mm
H: 59.2° ~ 2.4°
Auto / Manual
BLC / HLC / WDR(120dB)
25x
16x
0°~360° endless, Pan Speed: 0.1° ~ 200°/sec
-15° ~ 90° auto flip 180°, Tilt Speed: 0.1° ~120°/sec
Pan: 0.1° ~200° /s; Tilt: 0.1° ~120° /s
300
Pan: 240° /s; Tilt: 200° /s
Up to 24 areas
IR Range upto 100m, Up to 300 Presets, 5 Pattern, 8 Tour, 8 Auto Pan ,8 Auto Scan
Auto restore to previous PTZ and lens status after power failure
Activate Preset/ Scan/ Tour/ Pattern if there is no command in the specified period
Auto(ICR) / Color / B/W
H.265/H.264 / MJPEG
Main stream: 1080P/720P(1~50/60fps), Sub stream1: D1/CIF(1 ~ 25/30fps), Sub stream2: 720P/D1/ CIF (1 ~ 25/30fps)
G.711a/G.711Mu/G.726/AAC
1/1 channel In/Out
RJ-45 (10/100Base-T)
Tripwire, Intrusion, Abandoned/Missing, Face Detection
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x, ONVIF, PSIA, CGI



CP- UNP-D2521L10-DP

2 MP 1080P IR IP PTZ Camera



Feature

Alarm
Max Remote Users
Smart Phone
Memory Slot
Operating Temperature
Weather Proof Standard
Dimension
Weight
Power Source
Power Consumption

Specification

2/1 channel In/Out
20 users
iPhone, iPad, Android Phone
Upto 128GB
-40°C ~ 70°C / Less than 90% RH
IP66
Φ160(mm) x 295(mm)
4kg
DC 12V/3A, PoE+ (802.3at)
13W, 20W (IR on)