


CP- UNC-TD4K081L4-M

4K Full HD IR Bullet Camera - 40Mtr.

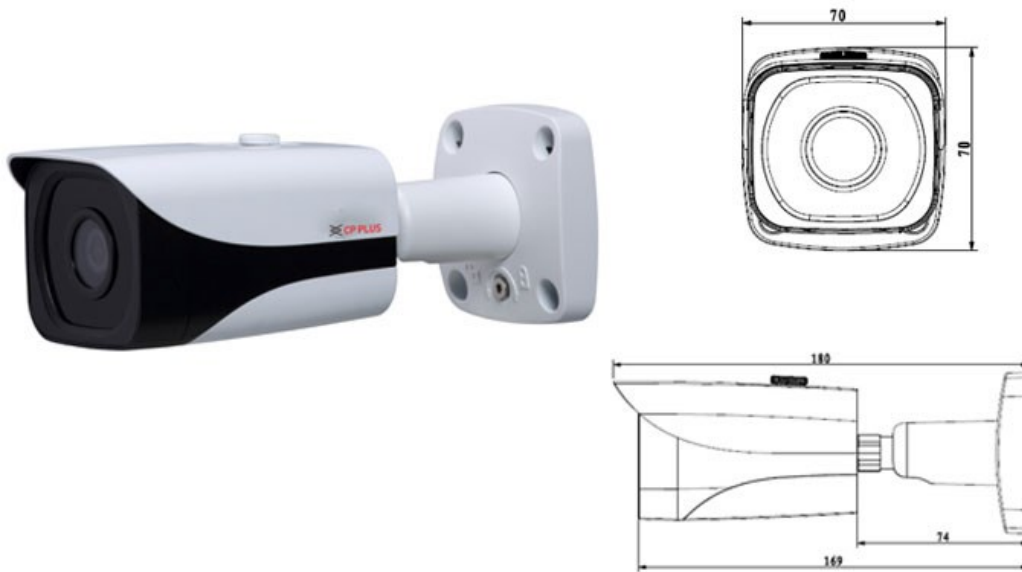

Main Features

- 1/2.5" 8MP Progressive scan CMOS
- 15fps@4K(3840×2160), 25/30fps@3Mp(2304×1296)
- H.265 and H.264 dual-stream encoding
- DWDR, Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 4mm fixed lens
- IR Range of 40 Mtrs, IP67, PoE, Micro SD memory
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-TD4K081L4-M

4K Full HD IR Bullet Camera - 40Mtr.



Feature

Image Sensor
Minimum Illumination
Effective Pixels
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Back Light Compensation
Video Compression
S/N Ratio
Video Streaming
Resolution
Digital Zoom
Motion detection
Privacy Mask
ICR
ROI
Bit Rate
Protocol
Smart Detection
Ethernet
User Account
Smart Phone
IR
Micro SD
No. of IR LEDs
Operating Temperature
Power Source

Specification

1/2.5" 8MP Progressive Scan CMOS
0.05Lux/F1.6 (Color), 0Lux/F1.6(IR on)
3840(H)x2160(V)
Auto/Manual, 1/3(4)~1/100000s
Auto/Natural/Street Lamp/Outdoor/Manual
4mm
Auto/Manual
BLC / HLC / DWDR
H.265+/H.265/H.264+/H.264
More than 50dB
Main Stream: 4K(1~15fps)/ 3M(1~25/30fps) / Sub Stream: D1(1~25/30fps) / Third Stream: 720P(1~25/30fps)
4K(3840x2160)/6M(3072x2048)/5M(2560x1920)/ 3M(2048x1536)/3M(2304x1296)/ 1080P (1920x1080)/ 1.3M(1280x960)/ 720P(1280x720)/D1(704x576/704x480)
16x
Off / On (4 Zone, Rectangle)
Up to 4 areas
Auto (ICR)/Color/B/W
Off / On (4 Zone)
CBR/VBR
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI
Tripwire, Intrusion, Object Abandoned/Missing, Face detect
RJ-45 (10/100Base-T)
10/ 20 Users
iPhone, iPad, Android Phone
IR Range of 40 Mtr.
Micro SD card 128GB
2 IR
-30° C ~ +60° C, Less than 95% RH
DC12V, PoE (802.3af)



CP- UNC-TD4K081L4-M

4K Full HD IR Bullet Camera - 40Mtr.



Feature

Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

<7W
IP67
180mm×70mm×70mm
0.41kg (0.91lb)